Submersible motors

van Dinther
Antriebstechnik

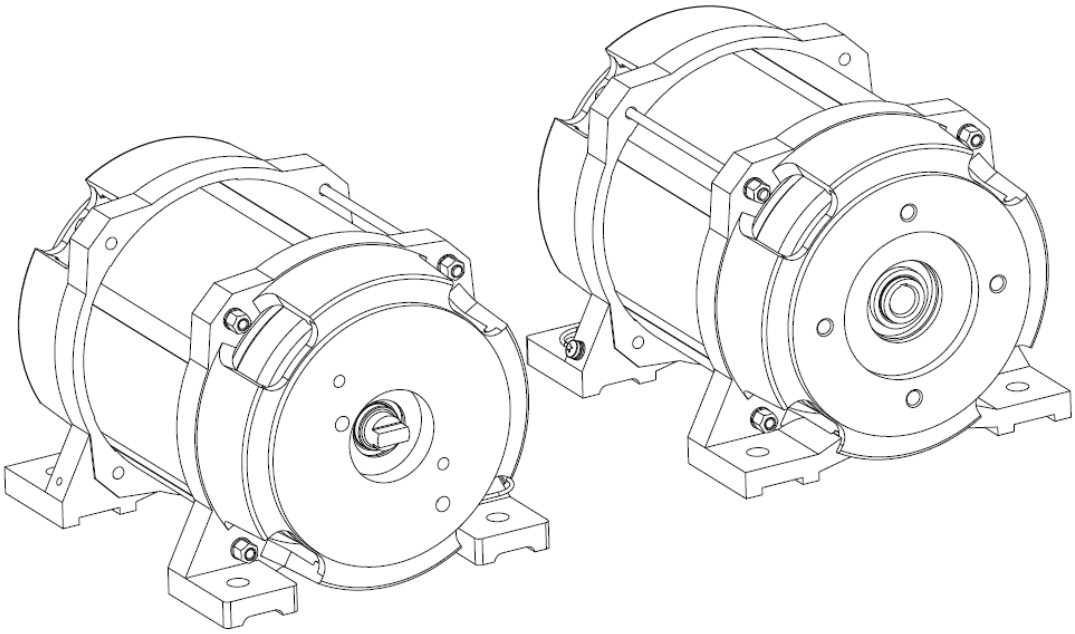

Submersible motors for direct mounting of Settima Continuum and Eckerle internal gear pumps

- power range 0.55 kW - 5.5 kW Operating mode S3
- 4-pole
- frame sizes 80, 90 and 112
- 230/400V – 50Hz
- two different output flanges on one motor
  - tang shaft with rectangular flange
  - cylindrical shaft and SAE-A flange

van Dinther Antriebstechnik GmbH
Engelbertstr. 17 -21 | 45892 Gelsenkirchen
hydraulik@van-dinther.de
0209/177554-40
Subject to change

Submersible motors

van Dinther Antriebstechnik

Frame size 112

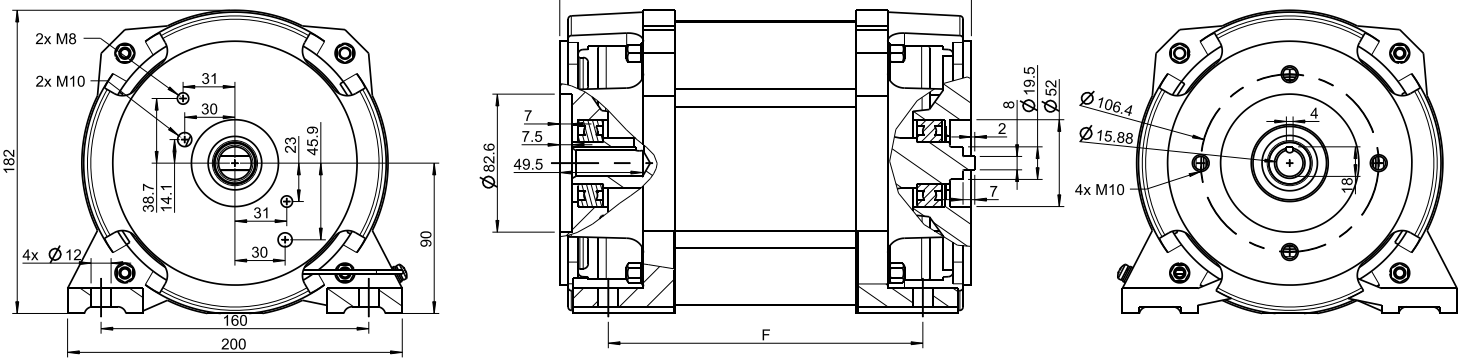

Frame size 90

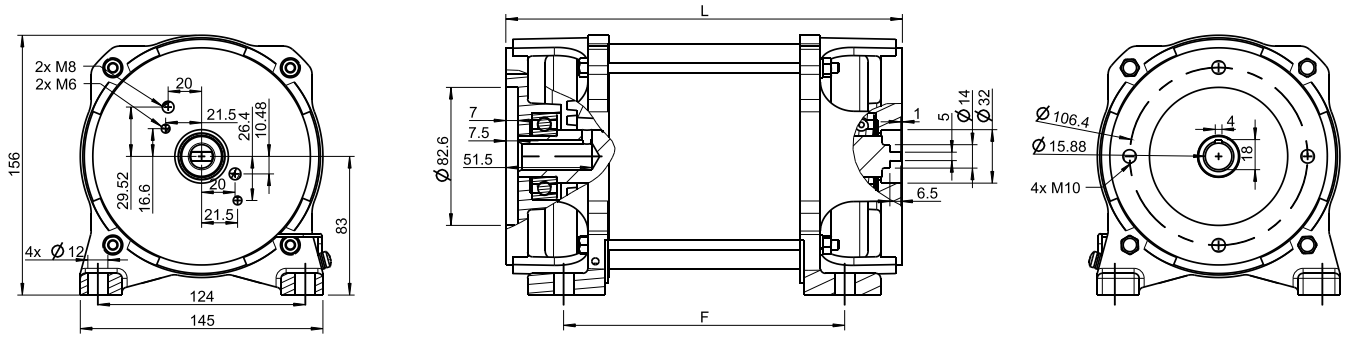

Frame size 80

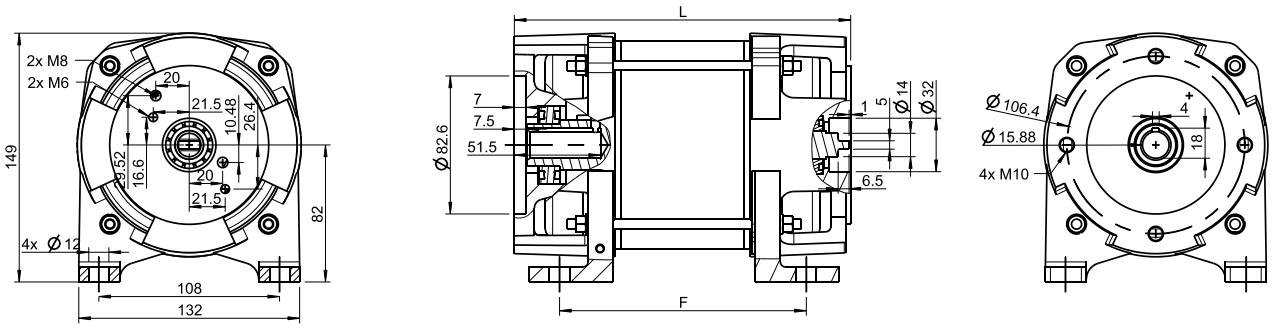

description	power kW	frame size	L mm	F mm	article
MP80L0,75N4 OG1 SAEA B3 400/50	0,75	80	181	127,5	6529
MP80L1,1N4 OG1 SAEA B3 400/50	1,1	80	186	132,5	6331
MP80L1,5N4 OG1 SAEA B3 400/50	1,5	80	201	147,5	6332
MP80L2,2N4 OG1 SAEA B3 400/50	2,2	80	231	177,5	6535
MP90L3,0N4 OG1 SAEA B3 400/50	3,0	90	237	168	6334
MP112L4,0N4 OG2 SAEA B3 400/50	4,0	112	216	158	6335
MP112L5,5N4 OG2 SAEA B3 400/50	5,5	112	246	188	6336

van Dinther Antriebstechnik GmbH
Engelbertstr. 17 -21 | 45892 Gelsenkirchen
hydraulik@van-dinther.de
0209/177554-40

Subject to change